



MALAYSIA EDITION

SQZ235EU

折叠式随车起重机

TRUCK MOUNTED CRANE



徐工徐工 助您成功
SOLID TO SUCCEED

单位地址：江苏省徐州市经济技术开发区驮蓝山路26号
邮编：221001 客服电话：400-110-9999
Add: No. 26, Tuolanshan Road, Economic and Technological Development Zone,
Xuzhou City, Jiangsu Province
Zip code : 221001 Hotline : 400-110-9999
版本号：2025-10



徐工官网
XCMG OFFICIAL WEBSITE



徐工服务号
XCMG SERVICE ACCOUNT



徐工徐工 助您成功
SOLID TO SUCCEED

SQZ235EU

折叠式随车起重机
TRUCK MOUNTED CRANE

MALAYSIA EDITION

主要特点 MAIN FEATURES

SQZ235EU是一款轻量化高端折叠式随车起重机，主体结构采用高强度钢板，产品自重降低10%；搭载多液压缸顺序伸缩、伸臂回油利用、外臂15度大反角、齿条缸驱动等行业先进技术，伸臂效率提高30%，起升能力更强，工作环境适应性更高，为客户提供更安全高效的操作体验。

SQZ235EU is a lightweight, high-end, knuckle boom loader crane, its main structure is made of high strength steel plates, reducing the weight by 10%. Equipped with industry-leading technologies such as sequential extension of hydraulic cylinders, return oil utilization of boom extension, 15° reverse angle of the 2nd boom, rack cylinder drive, improves boom extension efficiency by 30% and enable stronger lifting capacity and better adaptability to working environments, providing customers with a safer and more efficient operation experience.



SQZ235EU

折叠式随车起重机
TRUCK MOUNTED CRANE

MALAYSIA EDITION

主要特点 MAIN FEATURES



- 吊臂采用六边形截面一道焊缝成型，截面抗弯扭能力强，平稳性高，有效减小横向晃动，提升起吊安全性。
The crane boom adopts one-piece welding with a hexagonal section, featuring high section bending and torsion resistance, strong stability, effectively reducing lateral sway and improving lifting safety.



- 伸缩油缸外置控制臂体伸缩，可实现带载伸缩，装配效率较高，维修方便。
The telescopic cylinder is externally mounted to control boom telescoping, enabling load-bearing telescoping, with high assembly efficiency and convenient maintenance.



- 双腔伸缩支腿节省了安装空间的同时，实现了支腿大跨距，提高整机的稳定性。
The dual-cavity telescopic outriggers save installation space while achieving a large outrigger span, enhancing the overall machine stability.



- 下车操纵，可选配遥控操纵等不同操纵形式，满足不同客户的需求。
It supports lower vehicle operation, and can be optionally equipped with remote control and other operation modes to meet different customer needs.



- 吊臂采用负角设计，作业灵活，环境适应性更好。
The boom adopts a negative angle design, ensuring flexible operation and better environmental adaptability.



- 上车比例阀操控，微动性能好，操纵舒适度高，可实现吊机复合动作。
It is equipped with an upper vehicle proportional valve control, featuring excellent fine movement performance and high operation comfort, and can realize crane compound actions.



- 伸缩油缸采用顺序油缸，匹配电控再生平衡阀，实现顺序伸缩的同时，提高伸臂速度，并有效降低压降。
The telescopic cylinder adopts a sequential cylinder, matched with an electronically controlled regenerative balance valve. While realizing sequential telescoping, it improves boom extension speed and effectively reduces pressure drop.

SQZ235EU



折叠式随车起重机
TRUCK MOUNTED CRANE

MALAYSIA EDITION

主要技术参数 MAIN TECHNICAL PARAMETERS

类别 Category	项目 Item	单位 Unit	参数 Parameter	
			SQZ235EU.4	SQZ235EU.6
主要性能参数 Main Performance Parameters	最大起升力矩 Maximum lifting moment	kN·m	231	218
	最大起升质量 Maximum lifting mass	kg	8200	6800
	最大工作幅度 Maximum working range	m	12.3	16.8
	最大起升高度 Maximum lifting height	m	14.3	18.6
	吊臂长度 Jib length	m	4.6~12.3	4.7~16.8
	变幅范围 Luffing range	°	0~88	0~88
	回转角度 Slewing angle	°	400	400
液压系统参数 Parameters of the hydraulic system	支腿跨距 Outrigger span	m	2.36~5.6	2.29~7.4(自动翻转)
	产品自重 Product self-weight	kg	3015	3865
	系统额定流量 System rated flow	l/min	55	55
	额定工作压力 Rated working pressure	MPa	30	30
	推荐功率 Recommended power	kW	40	40
	工作环境温度 Working environment temperature	℃	-25 ~ +40	-25 ~ +40
	液压油箱容积 Volume of hydraulic oil tank	L	200	200

产品外形尺寸图 OUTLINE DIMENSIONS

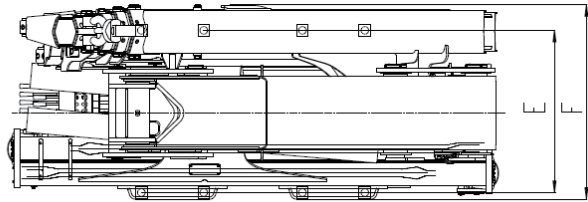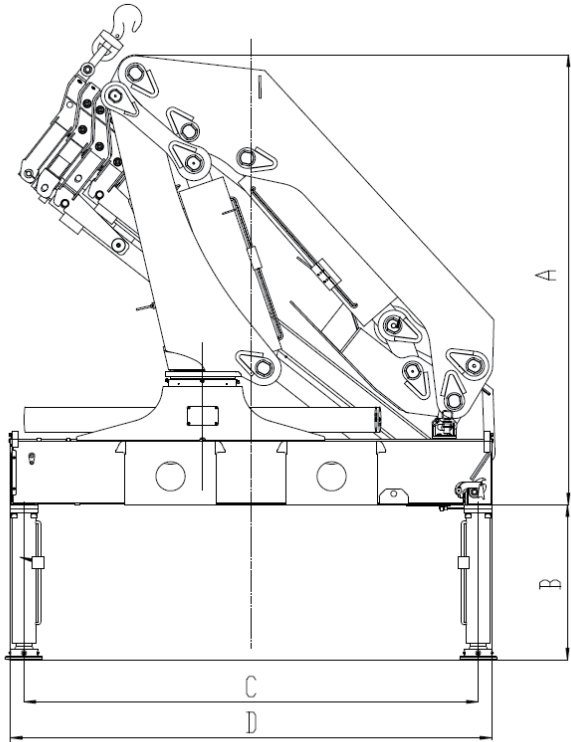

单位: mm	SQZ235EU.4	SQZ235EU.6
A	2300	2340
B	641~1391	943~1413
C	2364~5600	2290~7400
D	2500	2500
E	727	727
F	960	1210

起升性能曲线图 LIFTING PERFORMANCE

